




ESMD-1000

Pachymetry and Biometry devices



- Precise measurement with both immersion & contact mode
- Color LCD Touch screen display, extremely easy to use
- Portable & sleek design
- Built-in thermal printer
- Auto/Manual modes
- Auto gain control

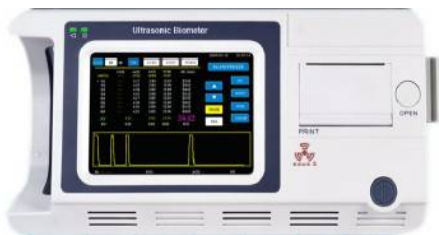

Cod. ESMD-1000P
Pachymeter device



Cod. ESMD-1000A
A-Scan Ultrasonic
Biometer device




Cod. ESMD-1000AP
A-Scan Ultrasonic Biometer
and Pachymeter device



Pulse Healthcare Technology
House: 11/1, Shahid Minar Road
Kallyanpur, Dhaka-1216, Bangladesh.
Mobile: +8801708008061
e-mail: info@pht.com.bd
web: www.pht.com.bd



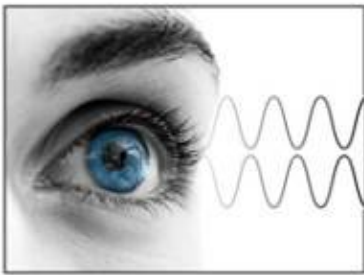

A-SCAN Precise and accurate A-scan measurement




A-SCAN Automatic Reading Automatic measure system, 8 readings for one group. Users can manually adjust the reading results during the automatic measuring



A-SCAN S.D. Function ESMD-1000A and ESMD-1000AP provide S.D.(Standard Deviation) to help evaluate reading reliability.



A-SCAN Splendid Measuring Mode Contact & Immersion measuring mode. Automatic reading with 4 different modes: Normal, Cataract, Aphakic and Special. Manual measuring available.

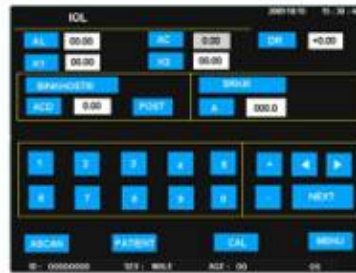

A-SCAN IOL Calculation 6 IOL formulas for IOL calculation. Instant formula switch. Automatic Axial Length import. Touch Screen input Parameters.



A-SCAN IOL Calculation Dual formulas display for results comparison. Easy access to database. One instant printout button.



PACHYETER Accurate Measurement Automatic reading for cornea thickness. Multiple or single reading point. Multiple measurements for single point cornea thickness. Average reading sharply increases the accuracy.



PACHYETER IOP (Intraocular Pressure) Adjustment Provides reference for tonometer measurement. Adjustable parameters according to users' experience.



Patient Management Built-in data archive for permanent memory of 180 patients' records.



Instant Printout Instant printout by built-in thermal printer. User-defined printing options.



PC Connection Uploading application software is developed to enable communication with PC and massive storage capability.




User-defined Interface


User may define acoustic velocity, IOP parameters, printing option etc.




ACCESSORIES



10MHz A-probe




20MHz straight P-probe



20MHz angled P-probe



Footswitch



PC Suite



CARACTERISTIQUES TECHNIQUES

A-Scan (only for ESMD-1000A & ESMD-1000 AP)	Pachymeter (only for ESMD-1000P & ESMD-1000AP)
<ul style="list-style-type: none"> • Probe: 10MHz with Fixation Red Light • Total Gain: 100dB with an adjustable range of 0~50dB • Biometry Accuracy: $\leq \pm 0,05\text{mm}$ • Resolution: 0,01mm • Measuring Range: 15~40mm • Measuring Mode: Contact, Immersion mode • Measuring Parameters: Anterior Chamber Depth, lens Thickness, Vitreous length and Axial length. • 5 Different Measuring Modes: Automatic (for Normal, Cataract, Aphakic and Special), and Manual • 8 Groups of Readings for Average, SD • IOL Formula: SRK-T, SRK-II, BINKHOST-11, HOLLADAY, HOFFER-Q and HAIGIS 	<ul style="list-style-type: none"> • Probe Frequency: 15~20MHz • Display Resolution: 1 μm • Biometry Accuracy: $\leq 5 \mu\text{m}$ • Measuring Scope: 230~1200 μm • Multiple Corneal Maps with Graphical Display
Others	
<ul style="list-style-type: none"> • Power Supply: AC 100~240V, 50/60Hz, 50VA • Dimension: 337 x 177 x 155 mm (L x W x H) • Weight: 1,7Kg 	

Standard Configuration:

Main Unit:

- ESMD-1000A A-Biometer only
- ESMD-1000P Pachymeter only
- ESMD-1000AP Biometer

Probe:

- 10MHz A probe (ESMD-1000A, ESMD-1000AP)
- 20MHz P Probe (ESMD-1000P, ESMD-1000AP)
- Footswitch
- Test Object
- PC Suite
- AC Adapter



Pulse Healthcare Technology
 House: 11/1, Shahid Minar Road
 Kallyanpur, Dhaka-1216, Bangladesh.
 Mobile: +8801708008061
 e-mail: info@pht.com.bd
 web: www.pht.com.bd



ESSE3 srl, Via Garibaldi 30
 14022 Castelnuovo D.B. (AT)
 Tel +39 011 99 27 706
 Fax +39 011 99 27 506
 e-mail esse3@chierinet.it
 web: www.esse3-medical.com

