




# ES-BJPX-A ES-BJPX-AII

Climate Incubator

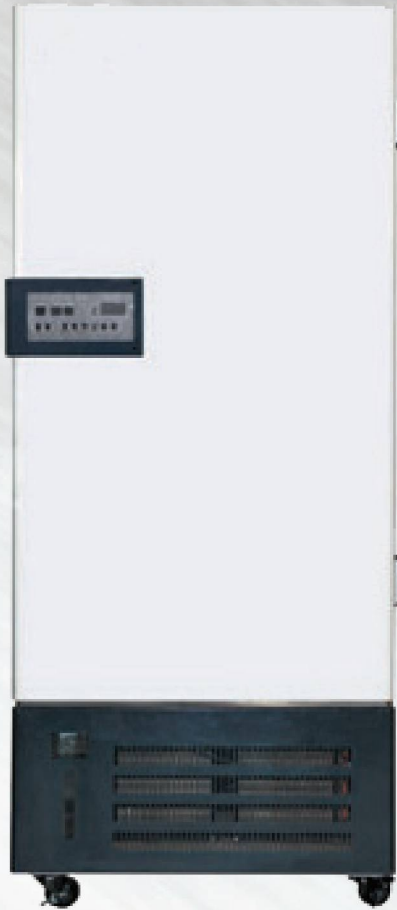

**Pulse Healthcare Technology**  
House: 11/1, Shahid Minar Road  
Kallyanpur, Dhaka-1216, Bangladesh.  
Mobile: +8801708008061  
e-mail: [info@pht.com.bd](mailto:info@pht.com.bd)  
web: [www.pht.com.bd](http://www.pht.com.bd)

**STERILIZATION**



# ES-BJPX-A

Climate Incubator



## FEATURES

1. Microprocessor PID control, accurate and stable.
2. Magnetic door sealing.
3. The three sides special glasses ensure good heat insulating ability and desired light intensity.
4. CFC-free refrigerant, eco-friendly and highly efficient.

## SPECIFICATIONS

Safety function:

1. Over temperature protection.
2. Temperature sensor for open circuit or short circuit protection.
3. Auto-off protection and alarm for abnormal situation.
4. Parameters can be saved automatically when power off or system error.

Temperature/Humidity area table.

Blue area: Illumination on, 18~45°C/50%~80%RH

Red area: Illumination off, 14~45°C/50%~90%RH

Model	ES-BJPX-A250	ES-BJPX-A300	ES-BJPX-A400
Capacity	250L	300L	400L
Lighting Type	2-side illumination		
Temp. Range	With illumination: 10~50 °C, Without illumination: 5~50 °C		
Temp. Fluctuation	±0.3°C		
Temp. Uniformity	±2°C		
Humidity Range	With illumination: 50%~80%, Without illumination: 50%~90%		
Humidity Fluctuation	± 3%RH		
Lighting Illumination	0~6000 Lux		
Illumination Control	6 degree adjustable		
Ambient Temp.	5~35°C		
Continuous Working Time	≥180h		
Consumption	1000W	1500W	2000W
Power Supply	AC220V ±10%, 50Hz		
Shelves	3 pcs/adjustable		
Internal Size(W*D*H)mm	470*460*1180	490*475*1280	560*600*1200
External Size(W*D*H)mm	880*670*1820	900*660*1920	1000*730*1870
Packing Size(W*D*H)mm	1010*800*1990	1040*790*2090	1140*870*2040
Gross Weight(kg)	148	158	178



# ES-BJPX-A11

Climate Incubator



## FEATURES

- 1 LCD display
- 2 Magnetic door sealing.
- 3 Microprocessor PID control, accurate and stable.
- 4 CFC-free refrigerant, eco-friendly and highly efficient.
- 5 The three sides special glasses ensure good heat insulating ability and desired light intensity.

Optional accessories:  
Printer

## SPECIFICATIONS


Safety function:

- \* Over temperature protection.
- \* Auto-off protection and alarm for abnormal situation.
- \* Temperature sensor for open circuit or short circuit protection.
- \* Parameters can be saved automatically when power off or system error.

Temperature/Humidity area table.

Blue area: Illumination on, 18~45°C/50%~80%RH

Red area: Illumination off, 14~45°C/50%~90%RH

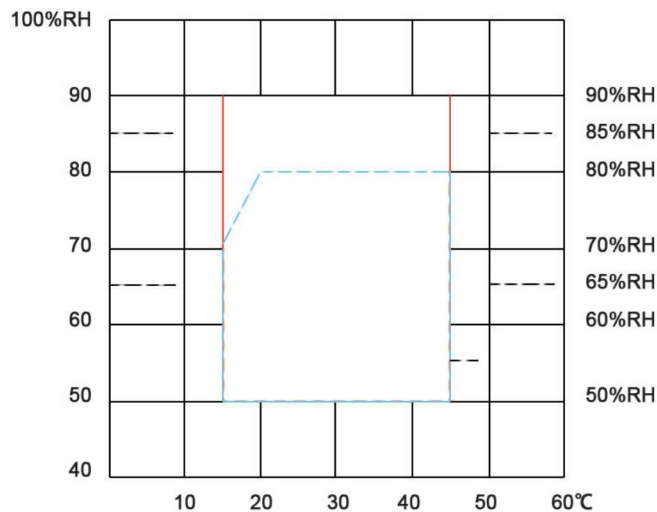

Notice: Please don't use in low temperature ( $\leq 20^{\circ}\text{C}$ ) for long time ( $\geq 160\text{h}$ ).



# ES-BJPX-AII

Climate Incubator



## SPECIFICATIONS

Model	ES-BJPX-AII150	ES-BJPX-AII250	ES-BJPX-AII300	ES-BJPX-AII400
Capacity	150L	250L	300L	400L
LightingType	3-side illumination			
Temp.Range	With illumination: 10~50 °C, Without illumination: 5~50 °C			
Temp. Fluctuation	±1.5°C			
Temp.Uniformity	±2°C			
Lighting Illumination	0~12000 Lux (5 degree adjustable)			
Ambient Temp.	5~35°C			
Continuous WorkingTime	≥180h			
Refrigerant	R134a (CFC free, eco-friendly)			
Shelves	3pcs/adjustable			
Consumption	1000W	1500W	2000W	2500W
Power Supply	AC220V ±10% 50Hz			
Internal Size (W*D*H)mm	420*420*930	470*460*1180	490*475*1280	560*600*1200
External Size(W*D*H)mm	730*580*1570	665*765*1820	685*780*1920	755*905*1840
Packing Size(W*D*H)mm	860*710*1740	890*770*1990	900*790*2100	1050*870*2040
Gross Weight(kg)	148	158	178	200



### Pulse Healthcare Technology

House: 11/1, Shahid Minar Road  
Kallyanpur, Dhaka-1216, Bangladesh.  
Mobile: +8801708008061  
e-mail: [info@pht.com.bd](mailto:info@pht.com.bd)  
web: [www.pht.com.bd](http://www.pht.com.bd)



ESSE3 srl, Via Garibaldi 30  
14022 Castelnuovo D.B. (AT)  
Tel +39 011 99 27 706  
Fax +39 011 99 27 506  
e-mail [esse3@chierinet.it](mailto:esse3@chierinet.it)  
web: [www.esse3-medical.com](http://www.esse3-medical.com)

